




tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT




GP22H

HORIZONTAL GROUT PUMP

Overall dimensions and weight

Width	916 mm	3'
Length	1770 mm	5'9"
Height	1420 mm	4'8"
Weight	1100 Kg	2425 lb

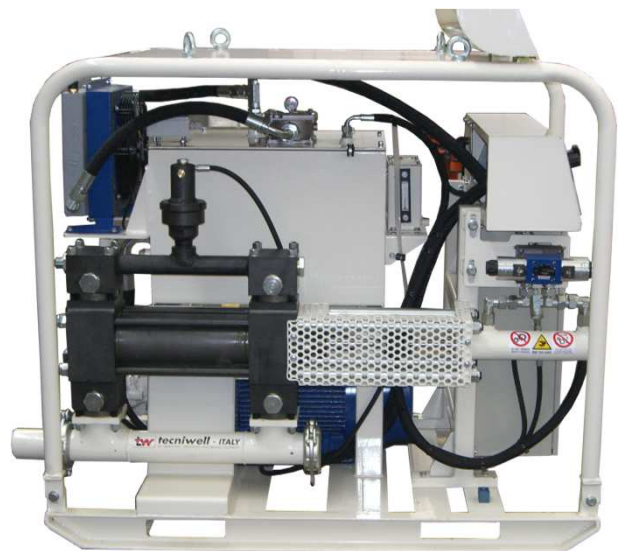

TECHNICAL FEATURES

Double effect piston / piston à double effet / Doppeleffekt Kolben

Max flow rate / débit maximale / maximale Durchflussrate

150 lt/min

40 gpm

Max pressure rate / pression maximale / maximal dDruckrate

100 bar

10 MPa

1450 PSI

Piston diameter / diamètre du piston / Kolbendurchmesser

5"

127 mm

Stroke / course / hubweg

8"

203 mm

Max stroke rate / coup par minute / max Hub pro Minute

32 / min

32 spm

Electric motor / moteur électrique / Elektromotor

22 kW

Suction diameter / diamètre d'aspiration / Saugdurchmesser

3"

76,2 mm


Output diameter / diamètre de sortie / Ausgangsdurchmesser

1"1/4

31,75 mm

DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

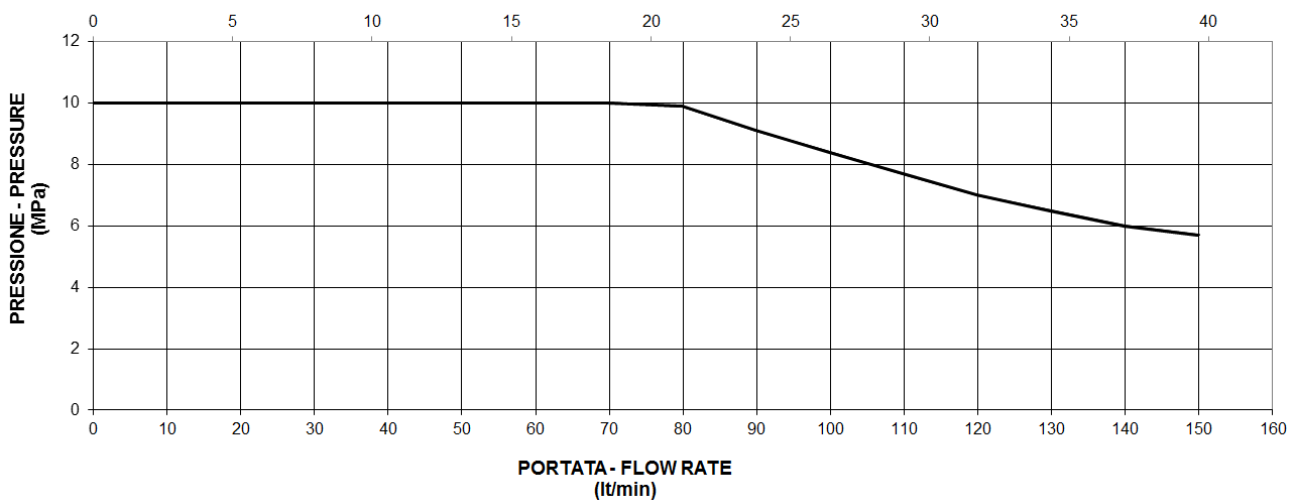

tw tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice