




JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



GP37H

HORIZONTAL GROUT PUMP

Overall dimensions and weight

Width	1476 mm	4'10"
Length	2360 mm	7'9"
Height	1640 mm	5'5"
Weight	2500 Kg	5511 lb



TECHNICAL FEATURES

Double piston / piston double / Doppelkolben

Max flow rate / débit maximale / maximale Durchflussrate

575 lt/min

151 gpm

Max pressure rate / pression maximale / maximal Druckrate

50 bar

5 MPa

725 PSI

Piston diameter / diamètre du piston / Kolbendurchmesser

6" – 7" – 7"1/2

152,4 - 177,8 - 190,5

Stroke / course / Hubweg

10"

254 mm

Max stroke rate / coup par minute / max Hub pro Minute

40 / min

40 spm

Electric motor / moteur électrique / Elektromotor

37 kW

Suction diameter / diamètre d'aspiration / Saugdurchmesser

5"

127 mm


Output diameter / diamètre de sortie / Ausgangsdurchmesser

3"

76,2 mm

DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

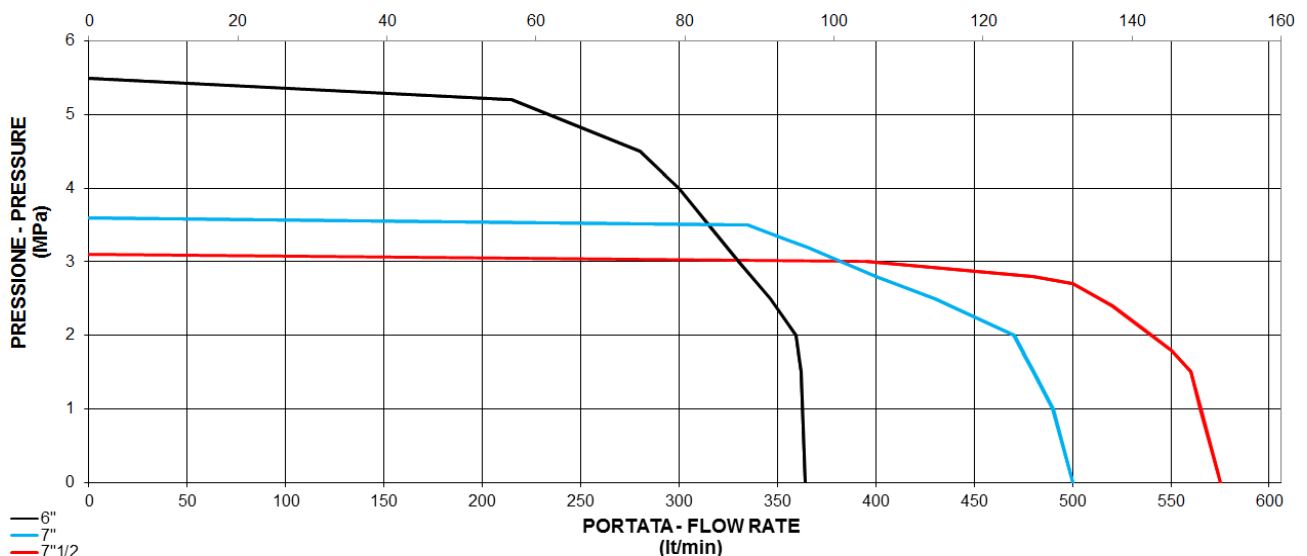

tw tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice