



JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



# GP3V

VERTICAL GROUT PUMP

## Overall dimensions and weight

Width	690 mm	2'3"
Length	650 mm	2'1"
Height	1770	5'9"
Weight	350 Kg	771 lb



## TECHNICAL FEATURES

**Double effect piston** / piston à double effet / Doppelleffekt Kolben

**Max flow rate** / débit maximale / maximale Durchflussrate

36 lt/min

9,5 gpm

**Max pressure rate** / pression maximale / maximal Druckrate

90 bar

9 MPa

1305 PSI

**Piston diameter** / diamètre du piston / Kolbendurchmesser

3"1/2

88,9 mm

**Stroke** / course / Hubweg

6"

152,4 mm

**Electric motor** / moteur électrique / Elektromotor

3 kW

**Suction diameter** / diamètre d'aspiration / Saugdurchmesser

2"

50,8 mm


**Output diameter** / diamètre de sortie / Ausgangsdurchmesser

1"

25,4 mm

DIAGRAMMA PORTATA - PRESSIONE  
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE  
(lt/min)

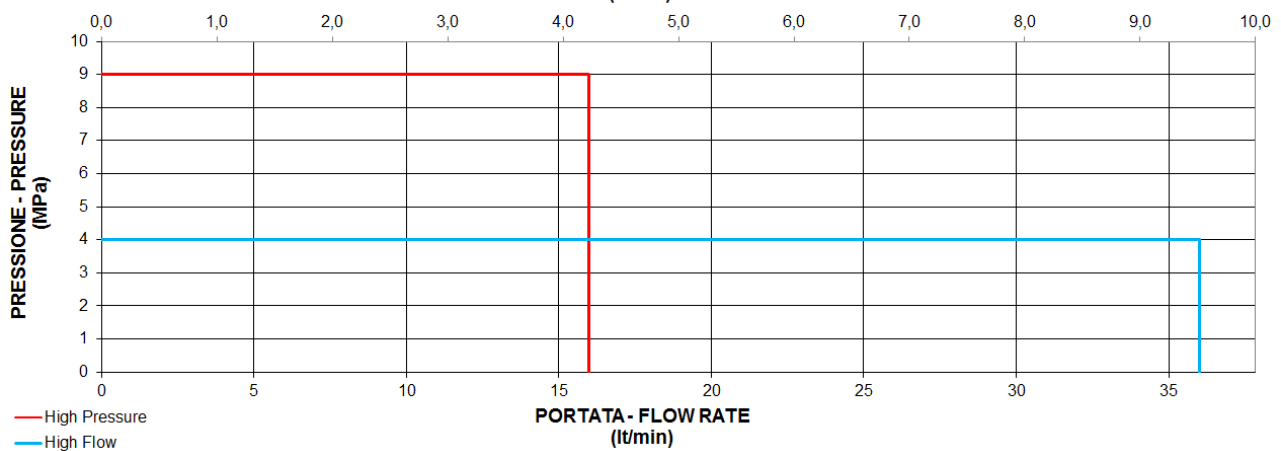

**tw tecniwell**

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086  
 e-mail: [info@tecniwell.com](mailto:info@tecniwell.com) – [www.tecniwell.it](http://www.tecniwell.it)

All technical data are purely indicative and subject to change without notice

