



JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



GP45H

HORIZONTAL GROUT PUMP

Overall dimensions and weight

Width	1476 mm	4'10"
Lenght	2360 mm	7'9"
Height	1640 mm	5'5"
Weight	2500 Kg	5511 lb



TECHNICAL FEATURES

Double piston / piston double / Doppelkolben

Max flow rate / débit maximale / maximale Durchflussrate

585 lt/min

154 gpm

Max pressure rate / pression maximale / maximal Druckrate

50 bar

5 MPa

725 PSI

Piston diameter / diamètre du piston / Kolbendurchmesser

6" – 7" – 7"1/2

152,4 - 177,8 - 190,5

Stroke / course / Hubweg

10"

254 mm

Max stroke rate / coup par minute / max Hub pro Minute

43 / min

43 spm

Electric motor / moteur électrique / Elektromotor

45 kW

Suction diameter / diamètre d'aspiration / Saugdurchmesser

5"

127 mm


Output diameter / diamètre de sortie / Ausgangsdurchmesser

3"

76,2 mm

DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

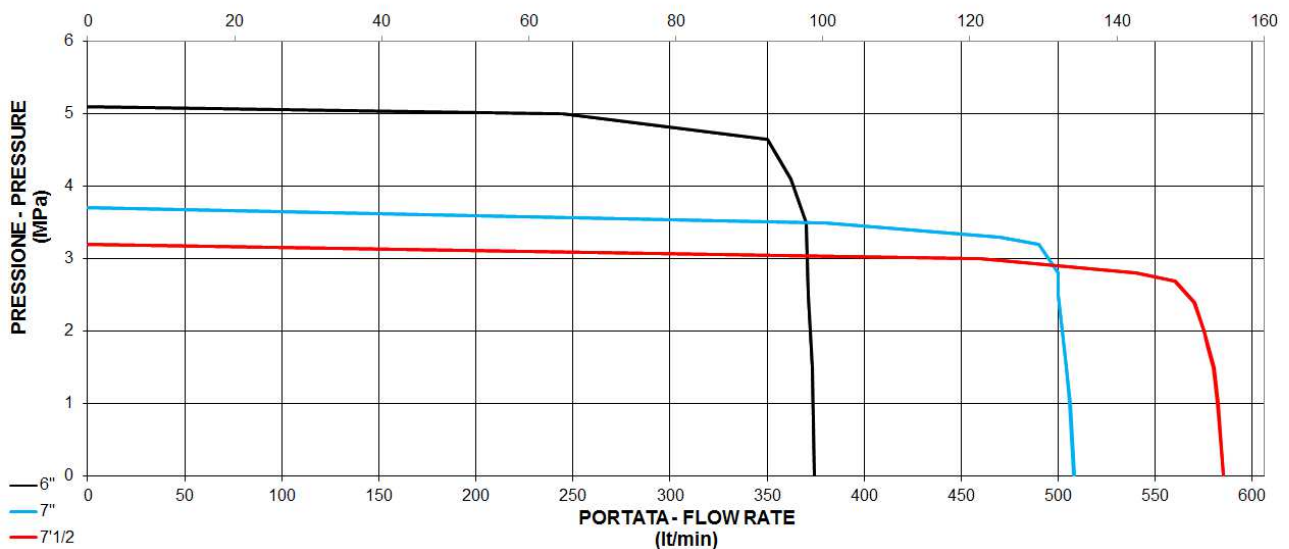

tw tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice

