





JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

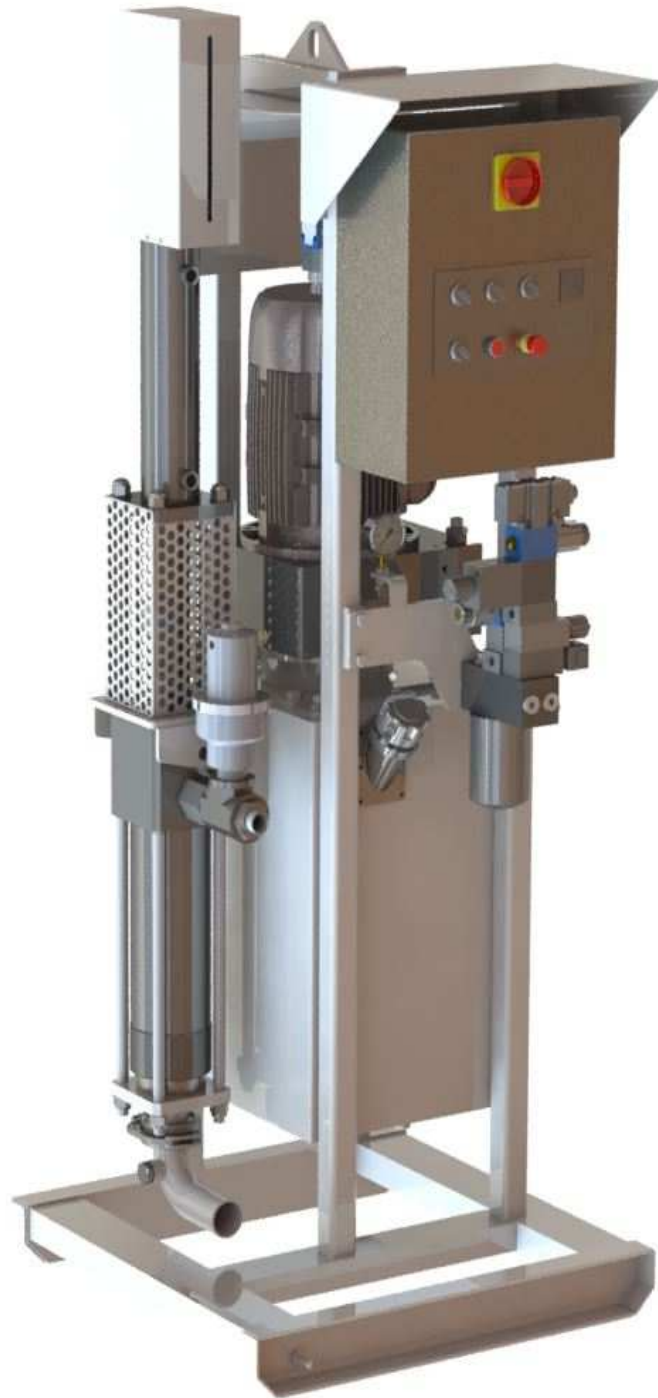


**GP5V**

*VERTICAL GROUT PUMP*

## Overall dimensions and weight

Width	770 mm	2'7"
Length	770 mm	2'7"
Height	1901	6'3"
Weight	420 Kg	926 lb

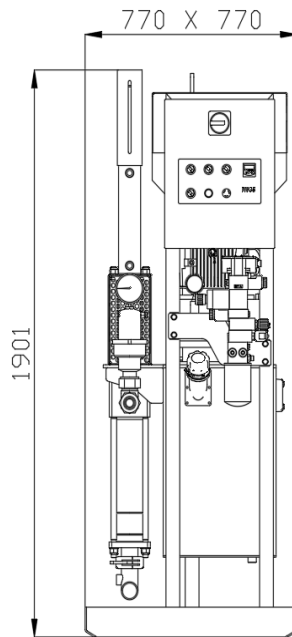

## TECHNICAL FEATURES

**Double effect piston / piston à double effet / Doppelleffekt Kolben**

**Max flow rate / débit maximale / maximale Durchflussrate**

**62 lt/min**

**16,4 gpm**

**Max pressure rate / pression maximale / maximal Druckrate**

**100 bar**

**10 MPa**

**1450 PSI**

**Piston diameter / diamètre du piston / Kolbendurchmesser**

**4"**

**101,6 mm**

**Stroke / course / Hubweg**

**8"**

**203,2 mm**

**Electric motor / moteur électrique / Elektromotor**

**5 kW**

**Suction diameter / diamètre d'aspiration / Saugdurchmesser**

**3"**

**76,2 mm**


**Output diameter / diamètre de sortie / Ausgangsdurchmesser**

**1"1/4**

**31,75 mm**

**DIAGRAMMA PORTATA - PRESSIONE  
PRESSURE-FLOW RATE DIAGRAM**

**PORTATA - FLOW RATE  
(lt/min)**

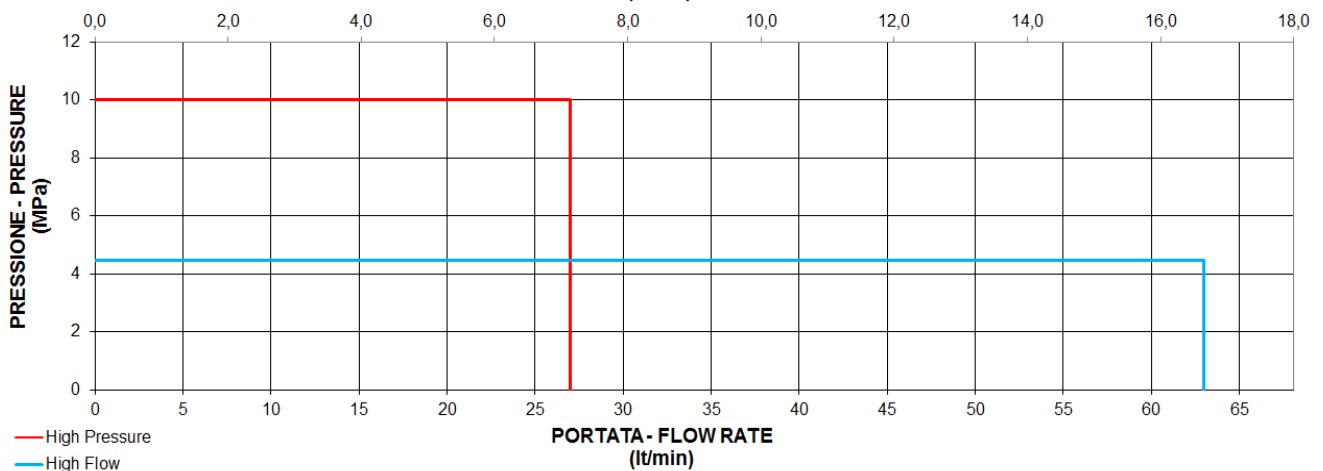

— High Pressure  
— High Flow

**tw tecniwell**

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086  
e-mail: [info@tecniwell.com](mailto:info@tecniwell.com) – [www.tecniwell.it](http://www.tecniwell.it)

All technical data are purely indicative and subject to change without notice

