



JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



GP9H

HORIZONTAL GROUT PUMP

Overall dimensions and weight

Width	916 mm	3'
Length	1530 mm	5'
Height	1150 mm	3'9"
Weight	680 Kg	1500 lb



TECHNICAL FEATURES

Double effect piston / piston à double effet / Doppeleffekt Kolben

Max flow rate / débit maximale / maximale Durchflussrate

150 lt/min

40 gpm

Max pressure rate / pression maximale / maximal Druckrate

90 bar

9 MPa

1305 PSI

Piston diameter / diamètre du piston / Kolbendurchmesser

5"

127 mm

Stroke / course / Hubweg

8"

203 mm

Max stroke rate / coup par minute / max Hub pro Minute

32 / min

32 spm

Electric motor / moteur électrique / Elektromotor

9 kW

Suction diameter / diamètre d'aspiration / Saugdurchmesser

3"

76,2 mm


Output diameter / diamètre de sortie / Ausgangsdurchmesser

1"1/4

31,75 mm

DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

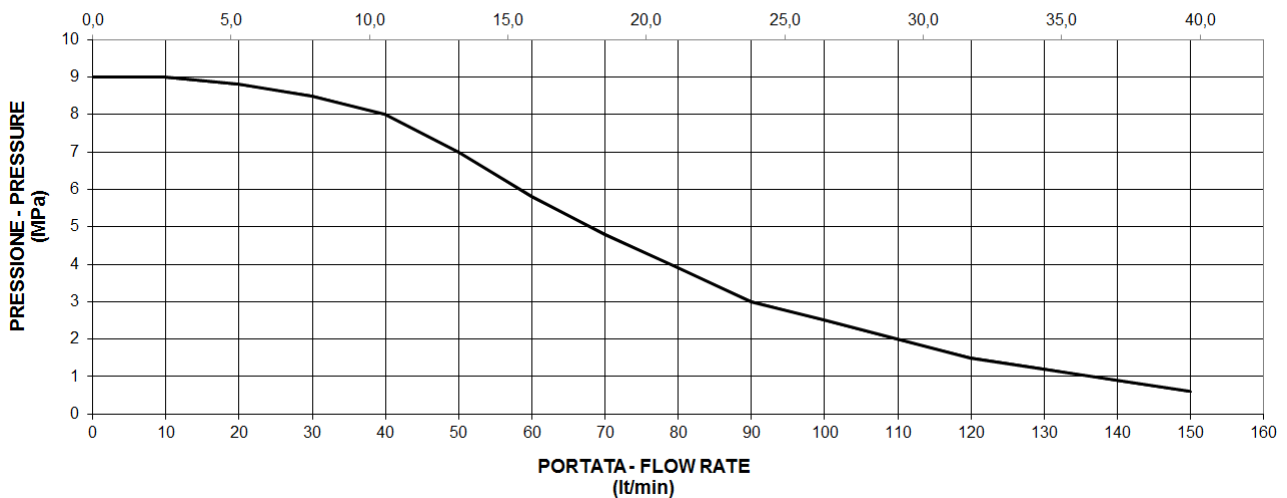

tw tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice

