





# tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

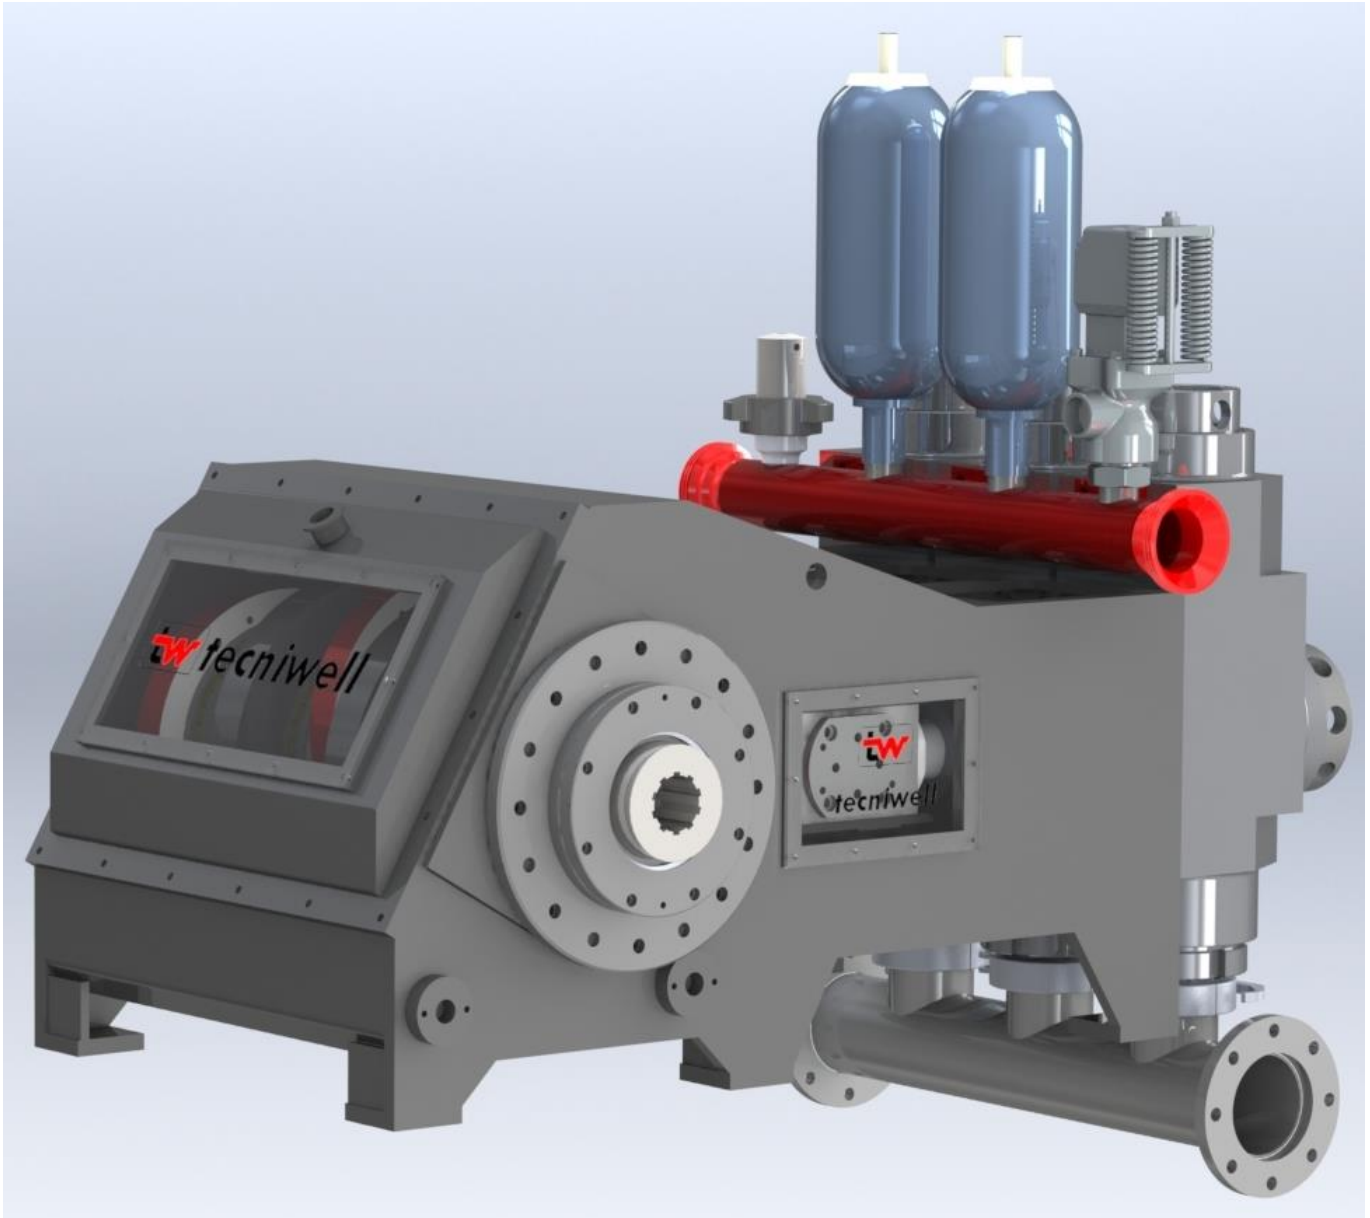

## TW 250

HIGH FLOW TRIPLEX PUMP

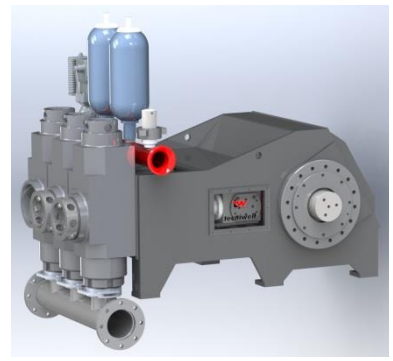

## Technical Features

<b>Max power input / puissance max / maximale Kraft</b>	<b>200 kW</b>	<b>270 HP</b>	
<b>Max pressure / pression maximale / maximaler Druck</b>	<b>13 MPa</b>	<b>130 bar</b>	<b>1885 psi</b>
<b>Max flow rate / débit maximale / maximale Durchflussrate</b>	<b>2600 lt/min</b>	<b>686 gpm</b>	
<b>Piston diameter / diamètre du piston / Kolbendurchmesser</b>	From 5"1/2 (139,7mm) to 7"1/2 (190,5 mm)		
<b>Stroke / Course / Hubweg</b>	5,5" – 139,7 mm		
<b>Maximum stroke rate / coup par minute / max Hub pro Minute</b>	240 / min	240 spm	
<b>Suction diameter / diamètre d'aspiration / Saugdurchmesser</b>	6"	152,4 mm	
<b>Output diameter / diamètre de sortie / Ausgangsdurchmesser</b>	4"	101,6 mm	


7" Control panel lcd monitor

### Bareshaft dimensions and weight

Width 1500 mm - 4'11"	Height 890 mm - 2'11"	Lenght 1950 mm - 6'5"	Weight 3600 Kg - 7936 lb
-----------------------	-----------------------	-----------------------	--------------------------

### Frame dimensions and weight

Width 2400 mm - 7'10"	Lenght 4800 mm - 15'9"	Height 2400 mm - 7'10'	Weight 9200 Kg - 20280 lb
-----------------------	------------------------	------------------------	---------------------------

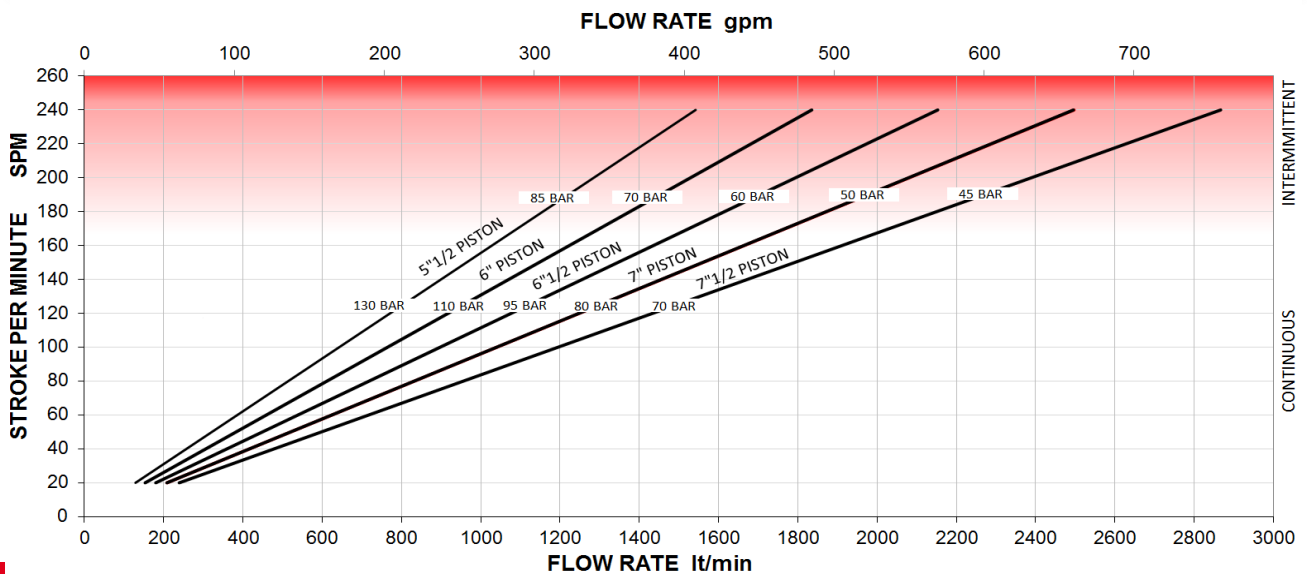

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086  
e-mail: [info@tecnivell.com](mailto:info@tecnivell.com) – [www.tecnivell.it](http://www.tecnivell.it)

All technical data are purely indicative and subject to change without notice