



tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



TW 200

HIGH PRESSURE TRIPLEX PUMP



Technical Features

Power input / puissance / Kraft	180 kW	245 HP	
Max pressure / pression maximale / maximaler Druck	40 MPa	400 bar	5800 psi
Max flow rate / débit maximale / maximale Durchflussrate	360 lt/min	95 gpm	
Piston diameter / diamètre du piston / Kolbendurchmesser	From 3" (76,2 mm) to 4" (101,6 mm)		
Stroke / Course / Hubweg	4" – 101,6 mm		
Maximum stroke rate / coup par minute / max Hub pro Minute	160 / min	160 spm	
Suction diameter / diamètre d'aspiration / Saugdurchmesser	3"	76,2 mm	
Output diameter / diamètre de sortie / Ausgangsdurchmesser	1"1/2	38,1 mm	


7" Control panel lcd monitor

Bareshaft dimensions and weight

Width 1150 mm - 3'9"	Height 1030 mm - 3'5"	Lenght 810 mm - 2'8"	Weight 2800 Kg - 6172 lb
----------------------	-----------------------	----------------------	--------------------------

Frame dimensions and weight

Width 2400 mm - 7'10"	Lenght 4800 mm - 15'9"	Height 2400 mm - 7'10'	Weight 9200 Kg - 20280 lb
-----------------------	------------------------	------------------------	---------------------------

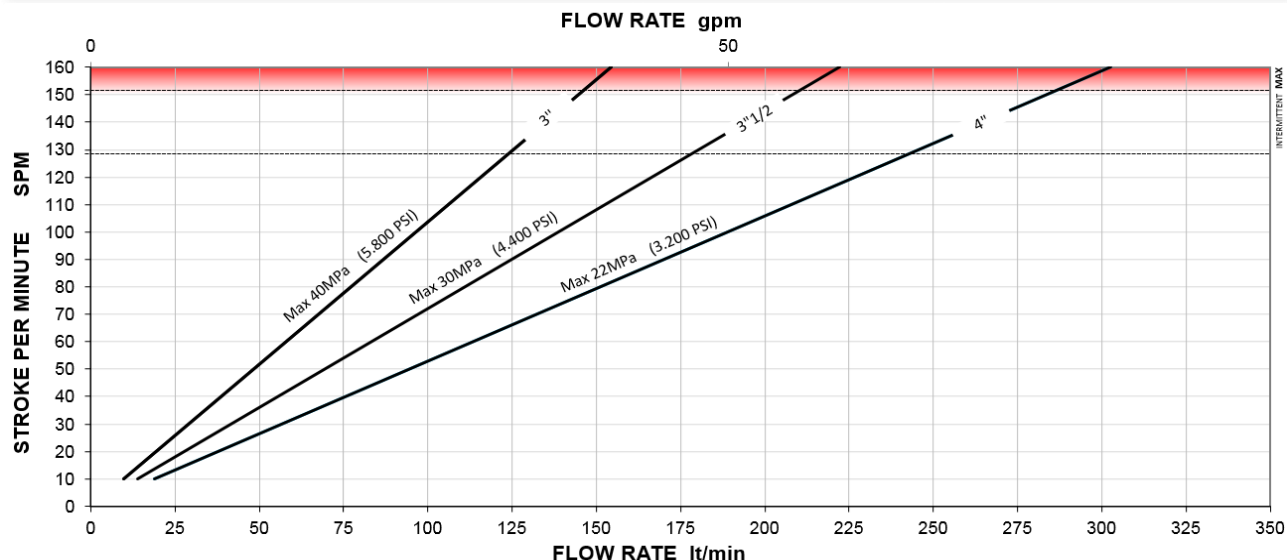

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice