





tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



TW 2015

COMPACT JET GROUTING UNIT

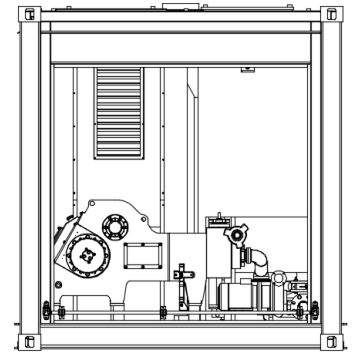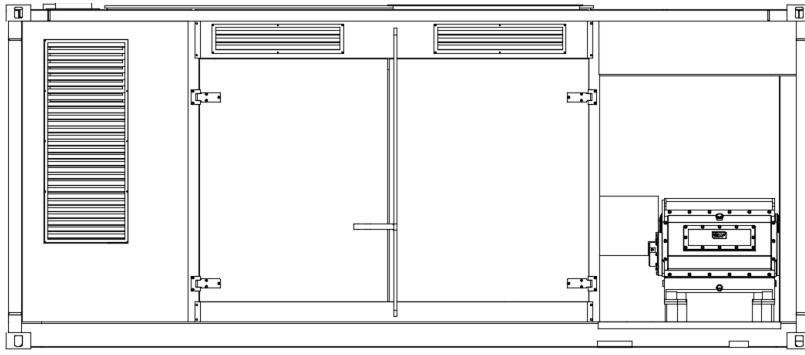

Triplex Pump - Technical Features

Power input / puissance / Kraft	180 kW	245 HP	
Max pressure / pression maximale / maximaler Druck	40 MPa	400 bar	5800 psi
Max flow rate / débit maximale / maximale Durchflussrate	395 lt/min	104 gpm	
Piston diameter / diamètre du piston / Kolbendurchmesser	From 3" (76,2 mm) to 4" (101,6 mm)		
Stroke / Course / Hubweg	4" – 101,6		
Maximum stroke rate / coup par minute / max Hub pro Minute	160 / min	160 spm	
Suction diameter / diamètre d'aspiration / Saugdurchmesser	3"	76,2 mm	
Output diameter / diamètre de sortie / Ausgangsdurchmesser	1"1/2	38,1 mm	


7" Control panel lcd monitor

Bareshaft dimensions and weight

Width 1150 mm - 3'9"	Height 1030 mm - 3'5"	Lenght 810 mm - 2'8"	Weight 2800 Kg - 6172 lb
----------------------	-----------------------	----------------------	--------------------------

Container dimensions and weight

Width 2500 mm - 8'2"	Lenght 6055 mm - 19'10"	Height 2585 mm - 8'6"	Weight 14000 Kg - 30864 lb
----------------------	-------------------------	-----------------------	----------------------------

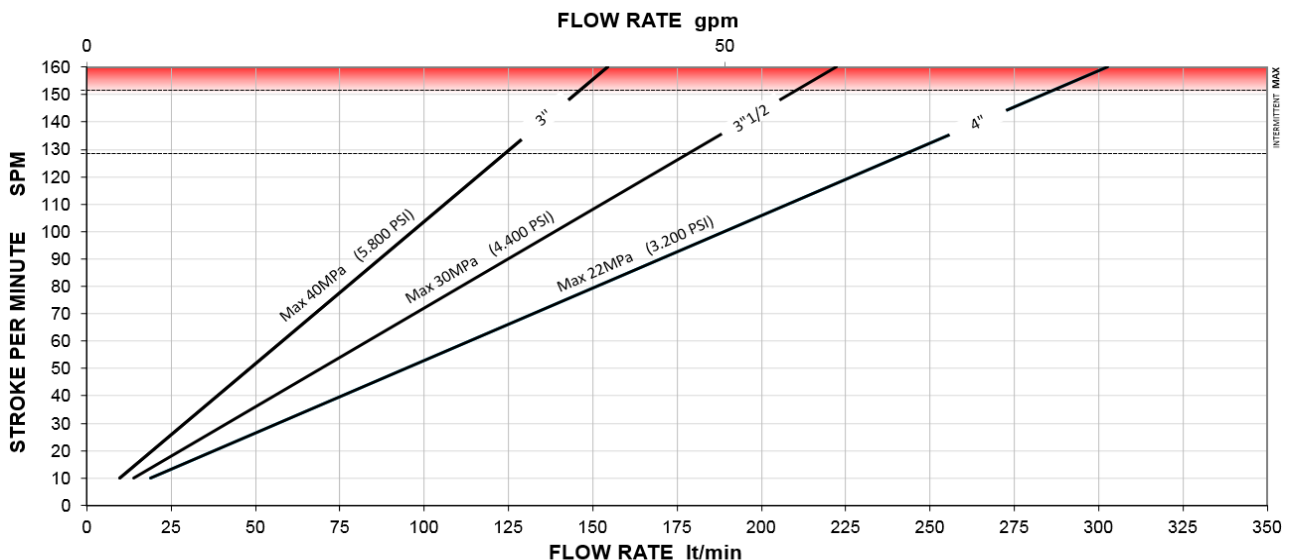



Mixer plant - Technical Features

Electronic load cell weighing system / système de pesage électronique/ Wägeelektronik für Wägezellen

Max hourly capacity / capacité horaire maximum / maximale Stundenleistung **15 m³** **66 gpm**

Electric power consumption / consommation électrique / Stromverbrauch **18 - 40 kW**

MIXER

Max capacity / capacité maximale / maximale Kapazität **750 lt** **198 gal**

Max pump flow rate / pompe débit maximale / Pumpe maximale Durchflussrate @1 bar **1900 lt/min** **500 gpm**

Pump motor / moteur de pompe / Pumpenmotor **11 kW**

AGITATOR

Max capacity / capacité maximale / maximale Kapazität **1500 lt** **396 gal**

Electric motor / moteur électrique / Elektromotor **2,2 Kw**

WATER TANK

Max capacity / capacité maximale / maximale Kapazität **1000 lt** **264 gal**

BOOSTER PUMP

Max pump flow rate / pompe débit maximale / Pumpe maximale Durchflussrate @1 bar **700 lt/min** **185 gpm**

Pump motor / moteur de pompe / Pumpenmotor **2,2 kW**

AIR COMPRESSOR

Air compressor capacity / capacité du compresseur d'air/ Luftverdichter Kapazität **400 lt/min** **105 gpm**

Air tank / réservoir d'air / Luftbehälter **100 lt** **26,4 gal**

Electric motor / moteur électrique / Elektromotor **3 kW**

Set for horizontal silo stacking and CSC certificate

CONTROL PANEL

Electronic control panel with 7" display PLC – daily registration on USB key

Panneau de commande électronique avec 7 " display PLC - enregistrement de la journée sur USB clé

Elektronisches Bedienfeld mit 7" display PLC – Täglich Registrierung mit USB Stift



JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice



Productivity and Reliability with full Safety compliance.



JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice