



tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



TW 800/M

HIGH PRESSURE TRIPLEX PUMP



Technical Features

Max power input / puissance max / maximale Kraft	566 kW	770 HP	
Max pressure / pression maximale / maximaler Druck	28 MPa	280 bar	4061 psi
Max flow rate / débit maximale / maximale Durchflussrate	2500 lt/min	660 gpm	
Piston diameter / diamètre du piston / kolbendurchmesser	From 5"1/2 (139,7mm) to 8" (177,8mm)		
Stroke / Course / Hubweg	8" – 177,8		
Maximum stroke rate / coup par minute / max Hub pro Minute	140 / min	140 spm	
Suction diameter / diamètre d'aspiration / Saugdurchmesser	8"	203,2 mm	
Output diameter / diamètre de sortie / Ausgangsdurchmesser	3"	76,2 mm	


7" Control panel lcd monitor

Bareshaft dimensions and weight

Width 1600 mm - 5'3"	Height 1030 mm - 3'5"	Lenght 2450 mm - 8'	Weight 7500 Kg - 16534 lb
----------------------	-----------------------	---------------------	---------------------------

Container dimensions and weight

Width 2500 mm - 8'2"	Lenght 7103 mm - 23'4"	Height 2870 mm - 9'5"	Weight 18000 Kg - 39683 lb
----------------------	------------------------	-----------------------	----------------------------

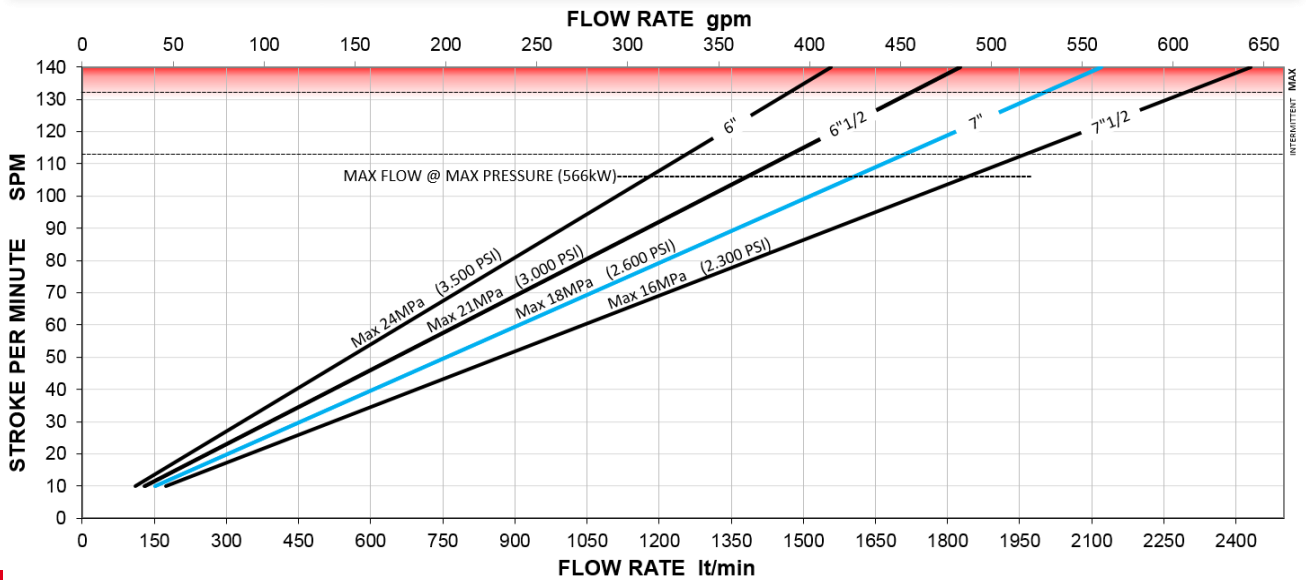

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice