




tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

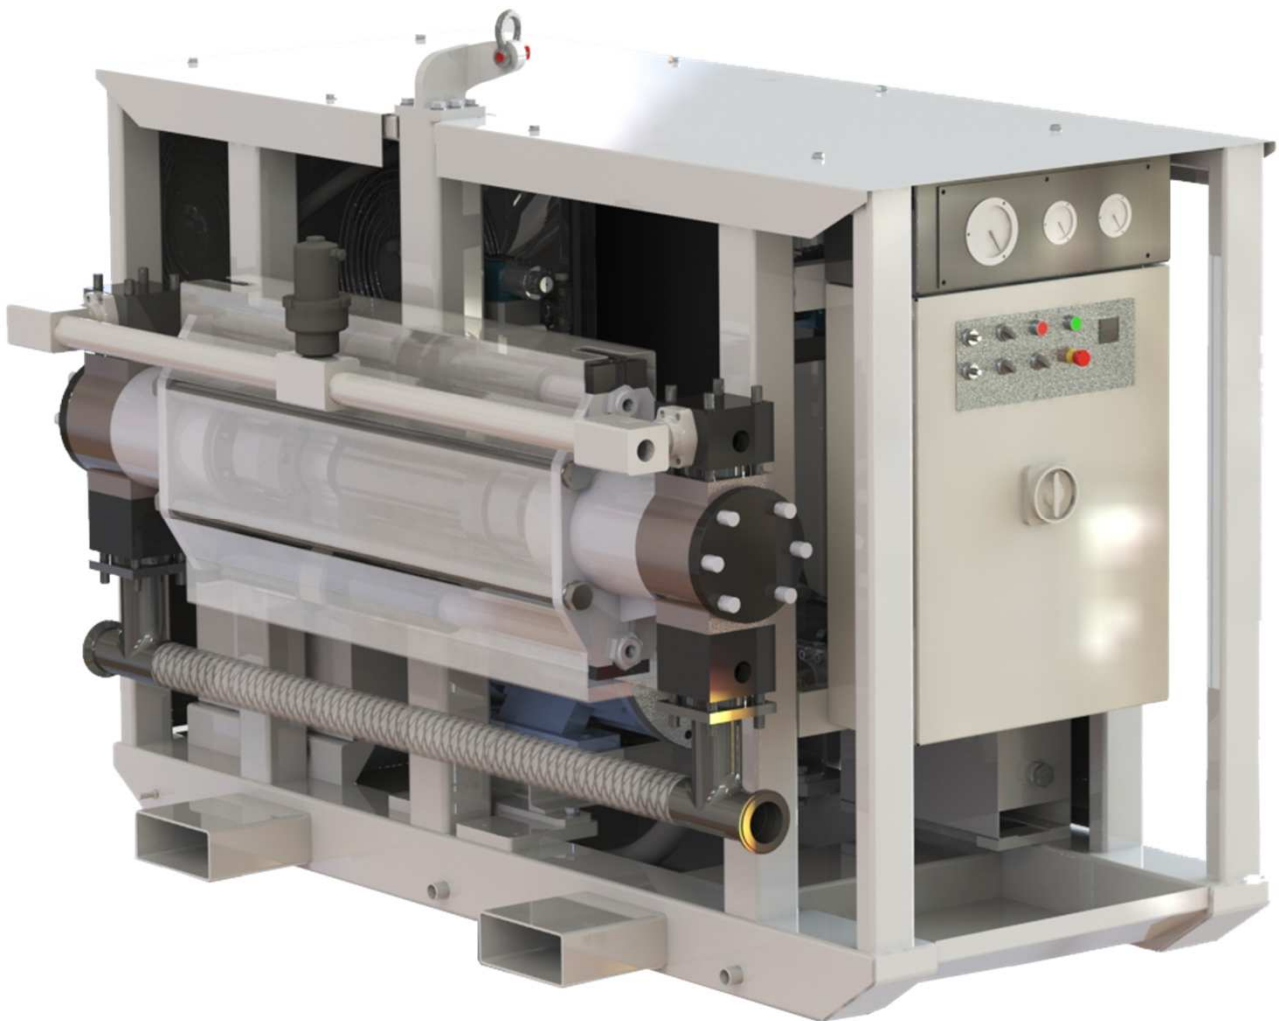


JP37H

JP37H/D

HORIZONTAL JETTING PUMP

Overall dimensions and weight

Width	1476 mm	4'10"
Length	2360 mm	7'9"
Height	1640 mm	5'5"
Weight	2500 Kg	5511 lb

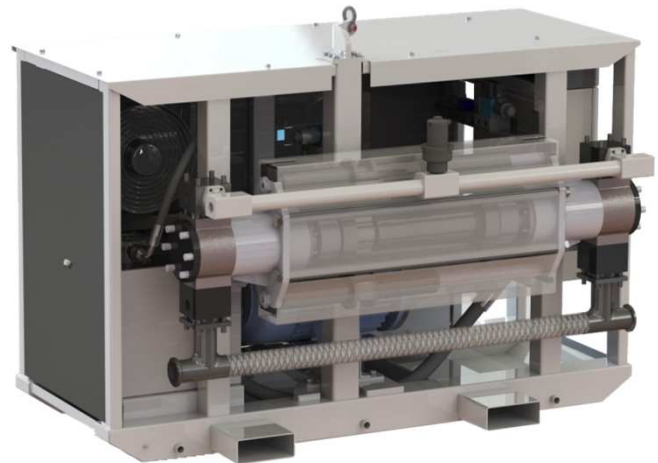


TECHNICAL FEATURES

Double piston / piston double / Doppelkolben

Max flow rate / débit maximale / maximale Durchflussrate	255 lt/min	67 gpm	
Max pressure rate / pression maximale / maximal Druckrate	240 bar	24 MPa	3480 PSI
Piston diameter / diamètre du piston / Kolbendurchmesser	2" ¼ – 3" – 4" - 5"	57,15 - 76,2 - 101,6 - 127	
Stroke / course / Hubweg	16"	406 mm	
Max stroke rate / coup par minute / max Hub pro Minute	25 / min	25 spm	
Electric motor / moteur électrique / Elektromotor	37 kW		
OPTIONAL: Diesel engine / moteur diesel / Dieselmotor	37 kW	50 HP	
Suction diameter / diamètre d'aspiration / Saugdurchmesser	5"	127 mm	
Output diameter / diamètre de sortie / Ausgangsdurchmesser	3"	76,2 mm	

DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

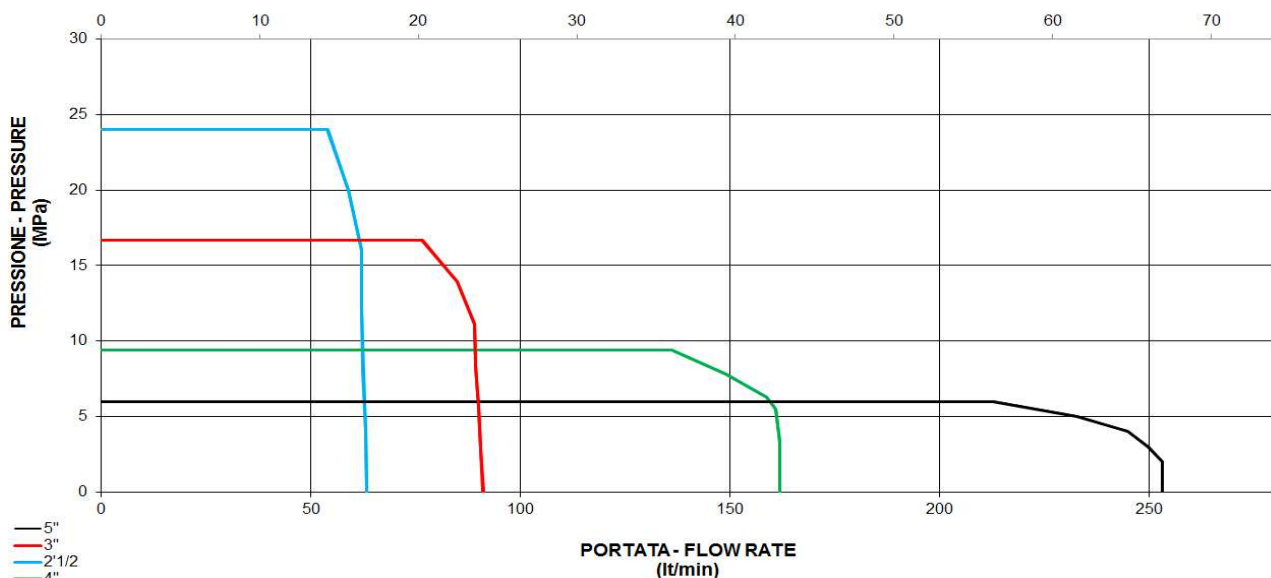

— 5"
— 3"
— 2 1/2"
— 4"

PORTATA - FLOW RATE
(lt/min)

tw tecniwell

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice