




JET-GROUTING, GROUTING AND DRILLING EQUIPMENT



TW 708/HP

TRIPLEX MUD PUMP



Technical Features

| | | |
|---|--------------------------------------|--------------------------------|
| Max power input / puissance max / maximale Kraft | 420 kW | 570 HP |
| Max pressure / pression maximale / maximaler Druck | 37 MPa | 370 bar 5365 psi |
| Max flow rate / débit maximale / maximale Durchflussrate | 2400 lt/min | 634 gpm |
| Piston diameter / diamètre du piston / Kolbendurchmesser | From 4" (101,6mm) to 7"1/2 (190,5mm) | |
| Stroke / Course / Hubweg | 8" – 177,8 | |
| Maximum stroke rate / coup par minute / max Hub pro Minute | 140 / min | 140 spm |
| Suction diameter / diamètre d'aspiration / Saugdurchmesser | 8" | 203,2 mm |
| Output diameter / diamètre de sortie / Ausgangsdurchmesser | 3" | 76,2 mm |


7" Control panel lcd monitor

Bareshaft dimensions and weight

| | | | |
|----------------------|-----------------------|---------------------|---------------------------|
| Width 1600 mm - 5'3" | Height 1030 mm - 3'5" | Lenght 2450 mm - 8' | Weight 7200 Kg - 15873 lb |
|----------------------|-----------------------|---------------------|---------------------------|

Container dimensions and weight

| | | | |
|----------------------|------------------------|-----------------------|----------------------------|
| Width 2500 mm - 8'2" | Lenght 6600 mm - 21'8" | Height 2610 mm - 8'7" | Weight 16000 Kg - 35273 lb |
|----------------------|------------------------|-----------------------|----------------------------|

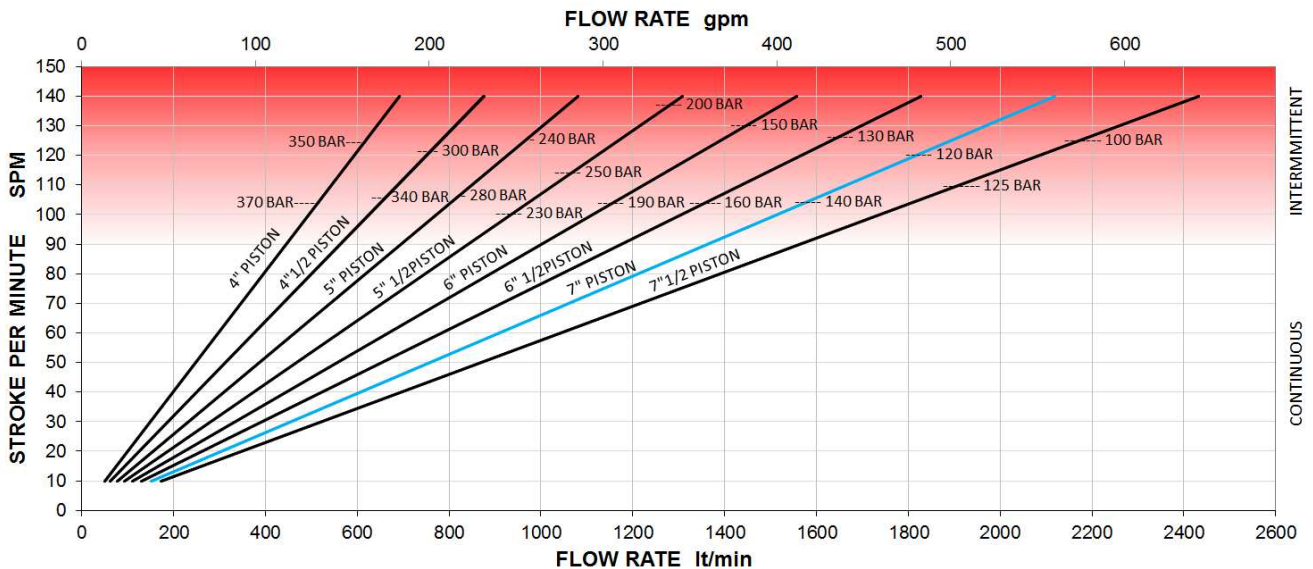

JET-GROUTING, GROUTING AND DRILLING EQUIPMENT

Via 1° Maggio, 61 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
 e-mail: info@tecnivell.com – www.tecniwell.it

All technical data are purely indicative and subject to change without notice